


complete guitar wiring: erratum

Gibson Explorer

correction

Page 252. Original diagram showed pots in reverse order with neck volume at right. Depicted wiring was sound but pot position incorrect.

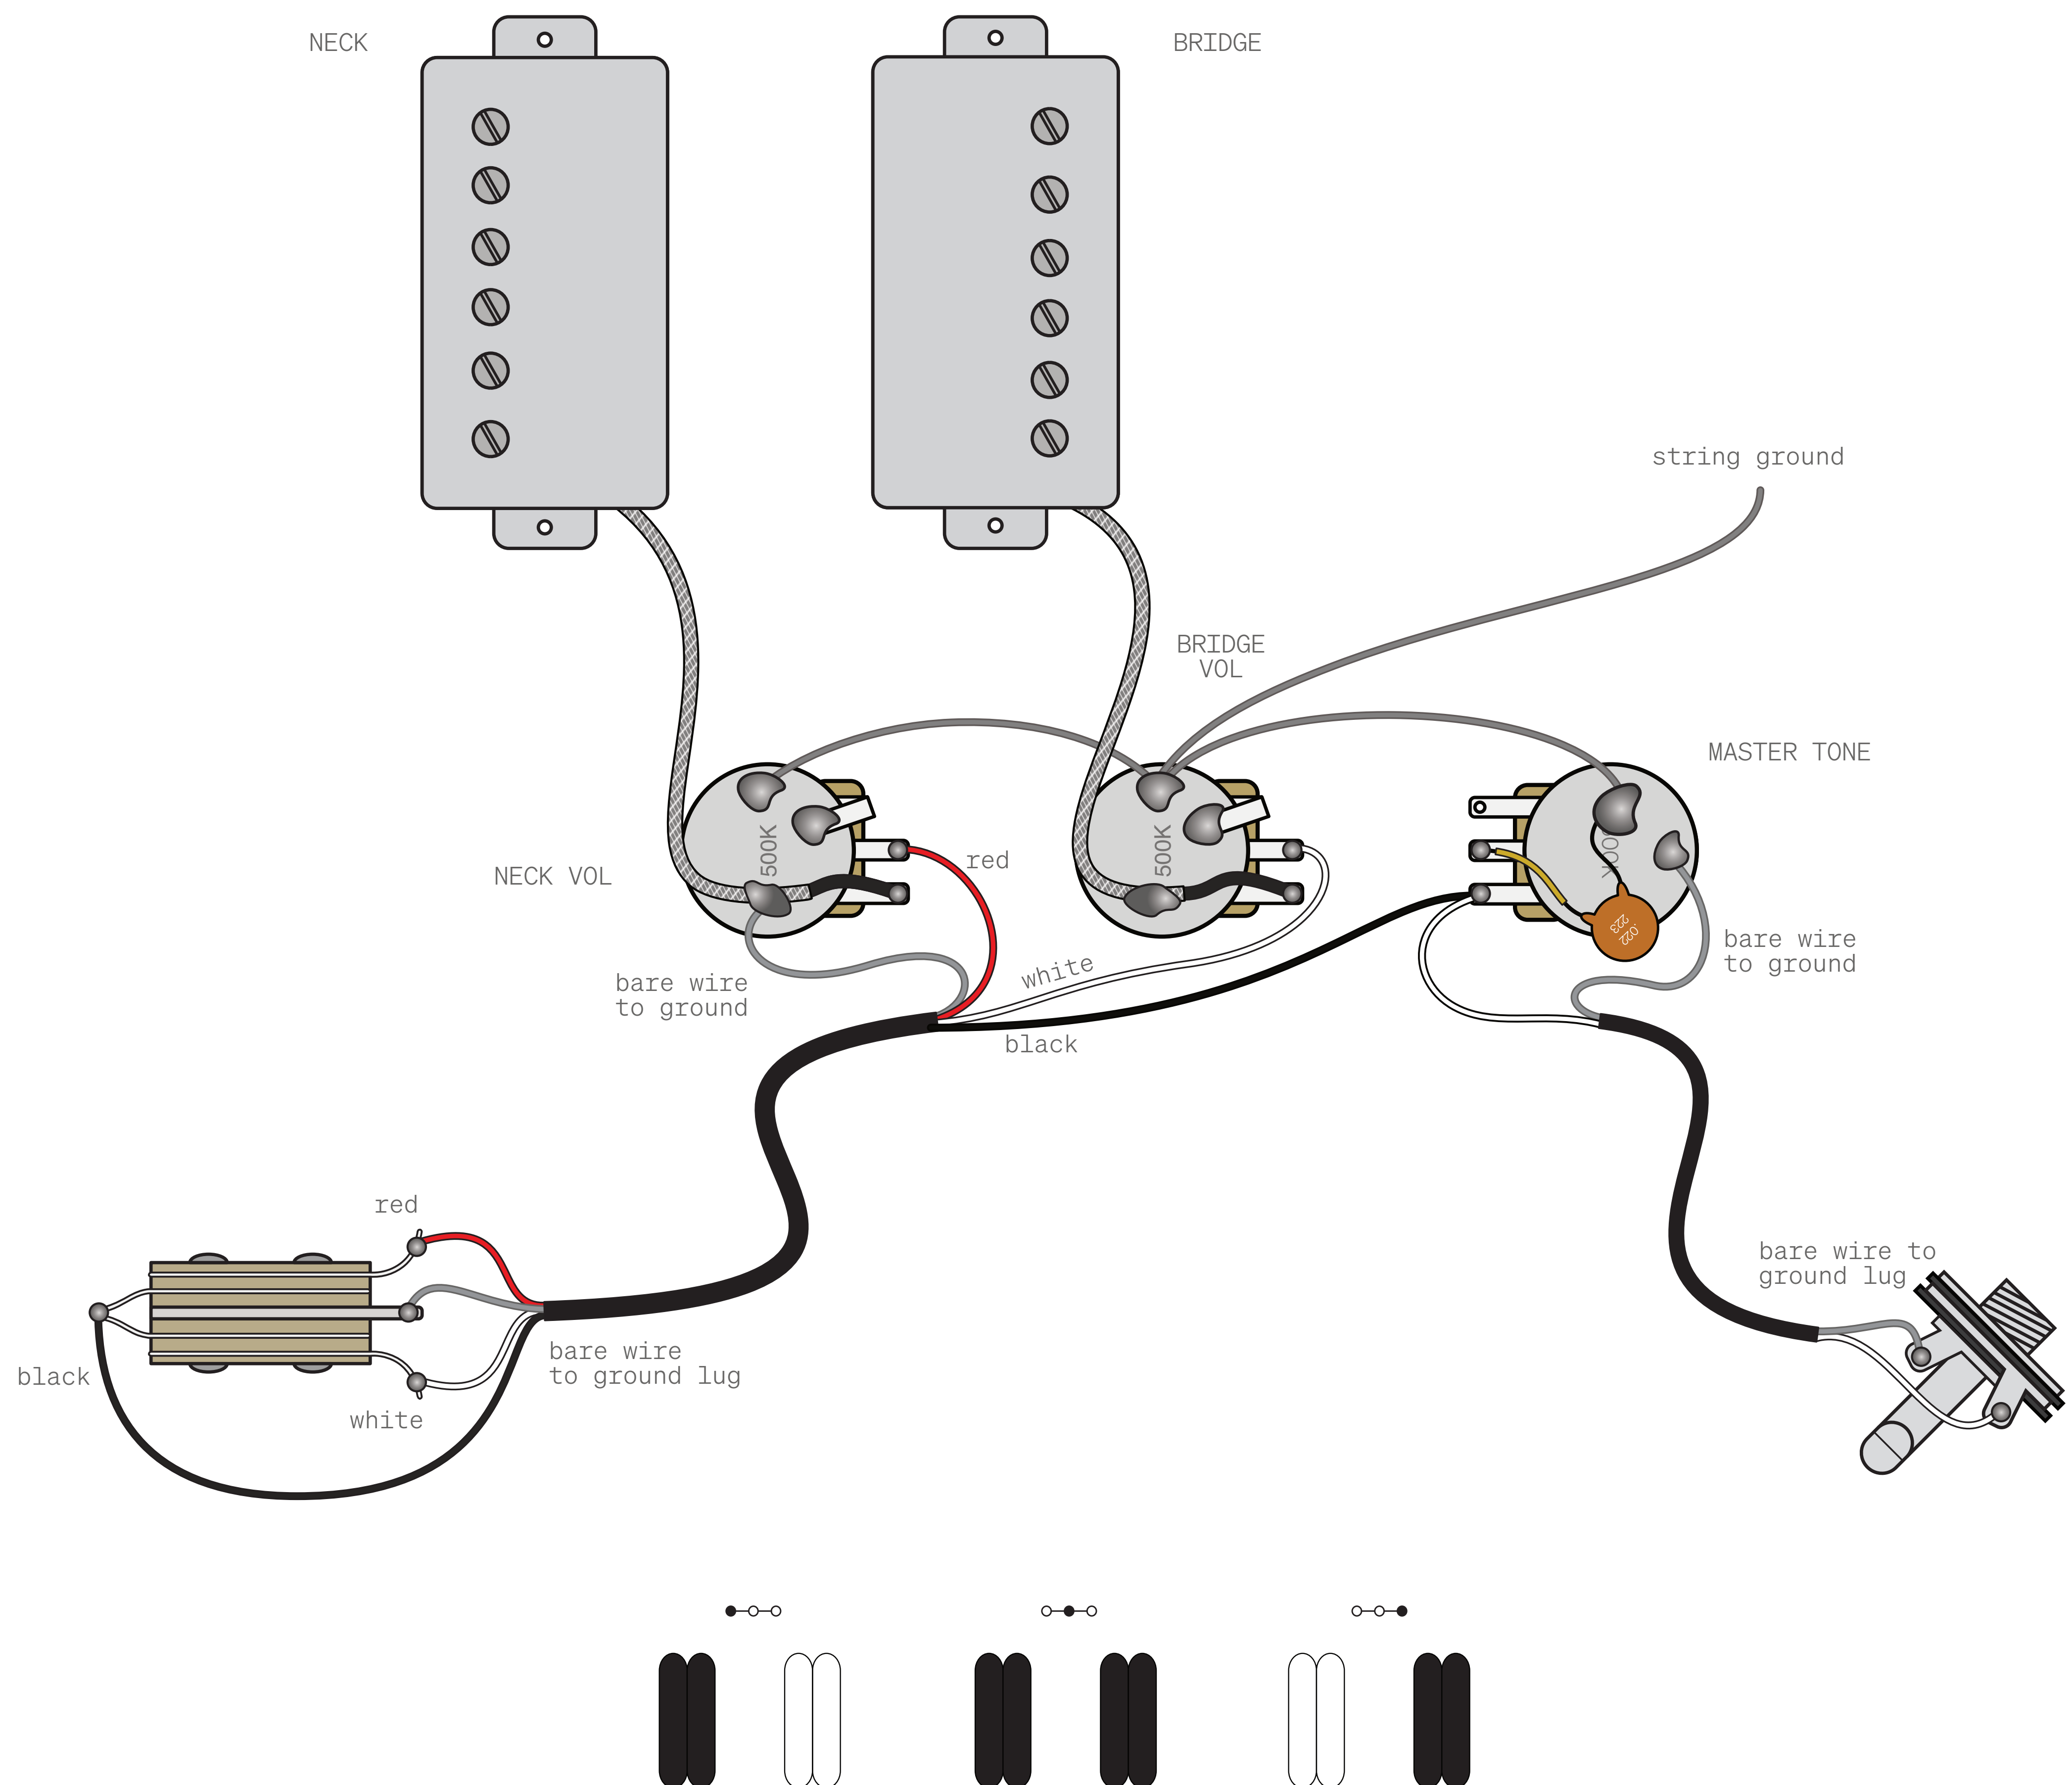

suggested specification

volumes: 500K
tone: 500K
tone capacitor: 0.022µF
switch: 3-Way Switchcraft toggle

notes

Individual volume for each pickup and a single master tone control. Straightforward circuit. Shown with multi-core cables for switch and jack interconnects. Make sure to solder all those bare wires from the cables to an appropriate ground point and keep an eye on them to make sure they can't shift and short off any hot lugs.