


complete guitar wiring: erratum

Chapman ML3 Pro Modern (HH)

correction

Page 200. Original diagram omitted switch jumper wires for pickup hots (shown here blue and pink).

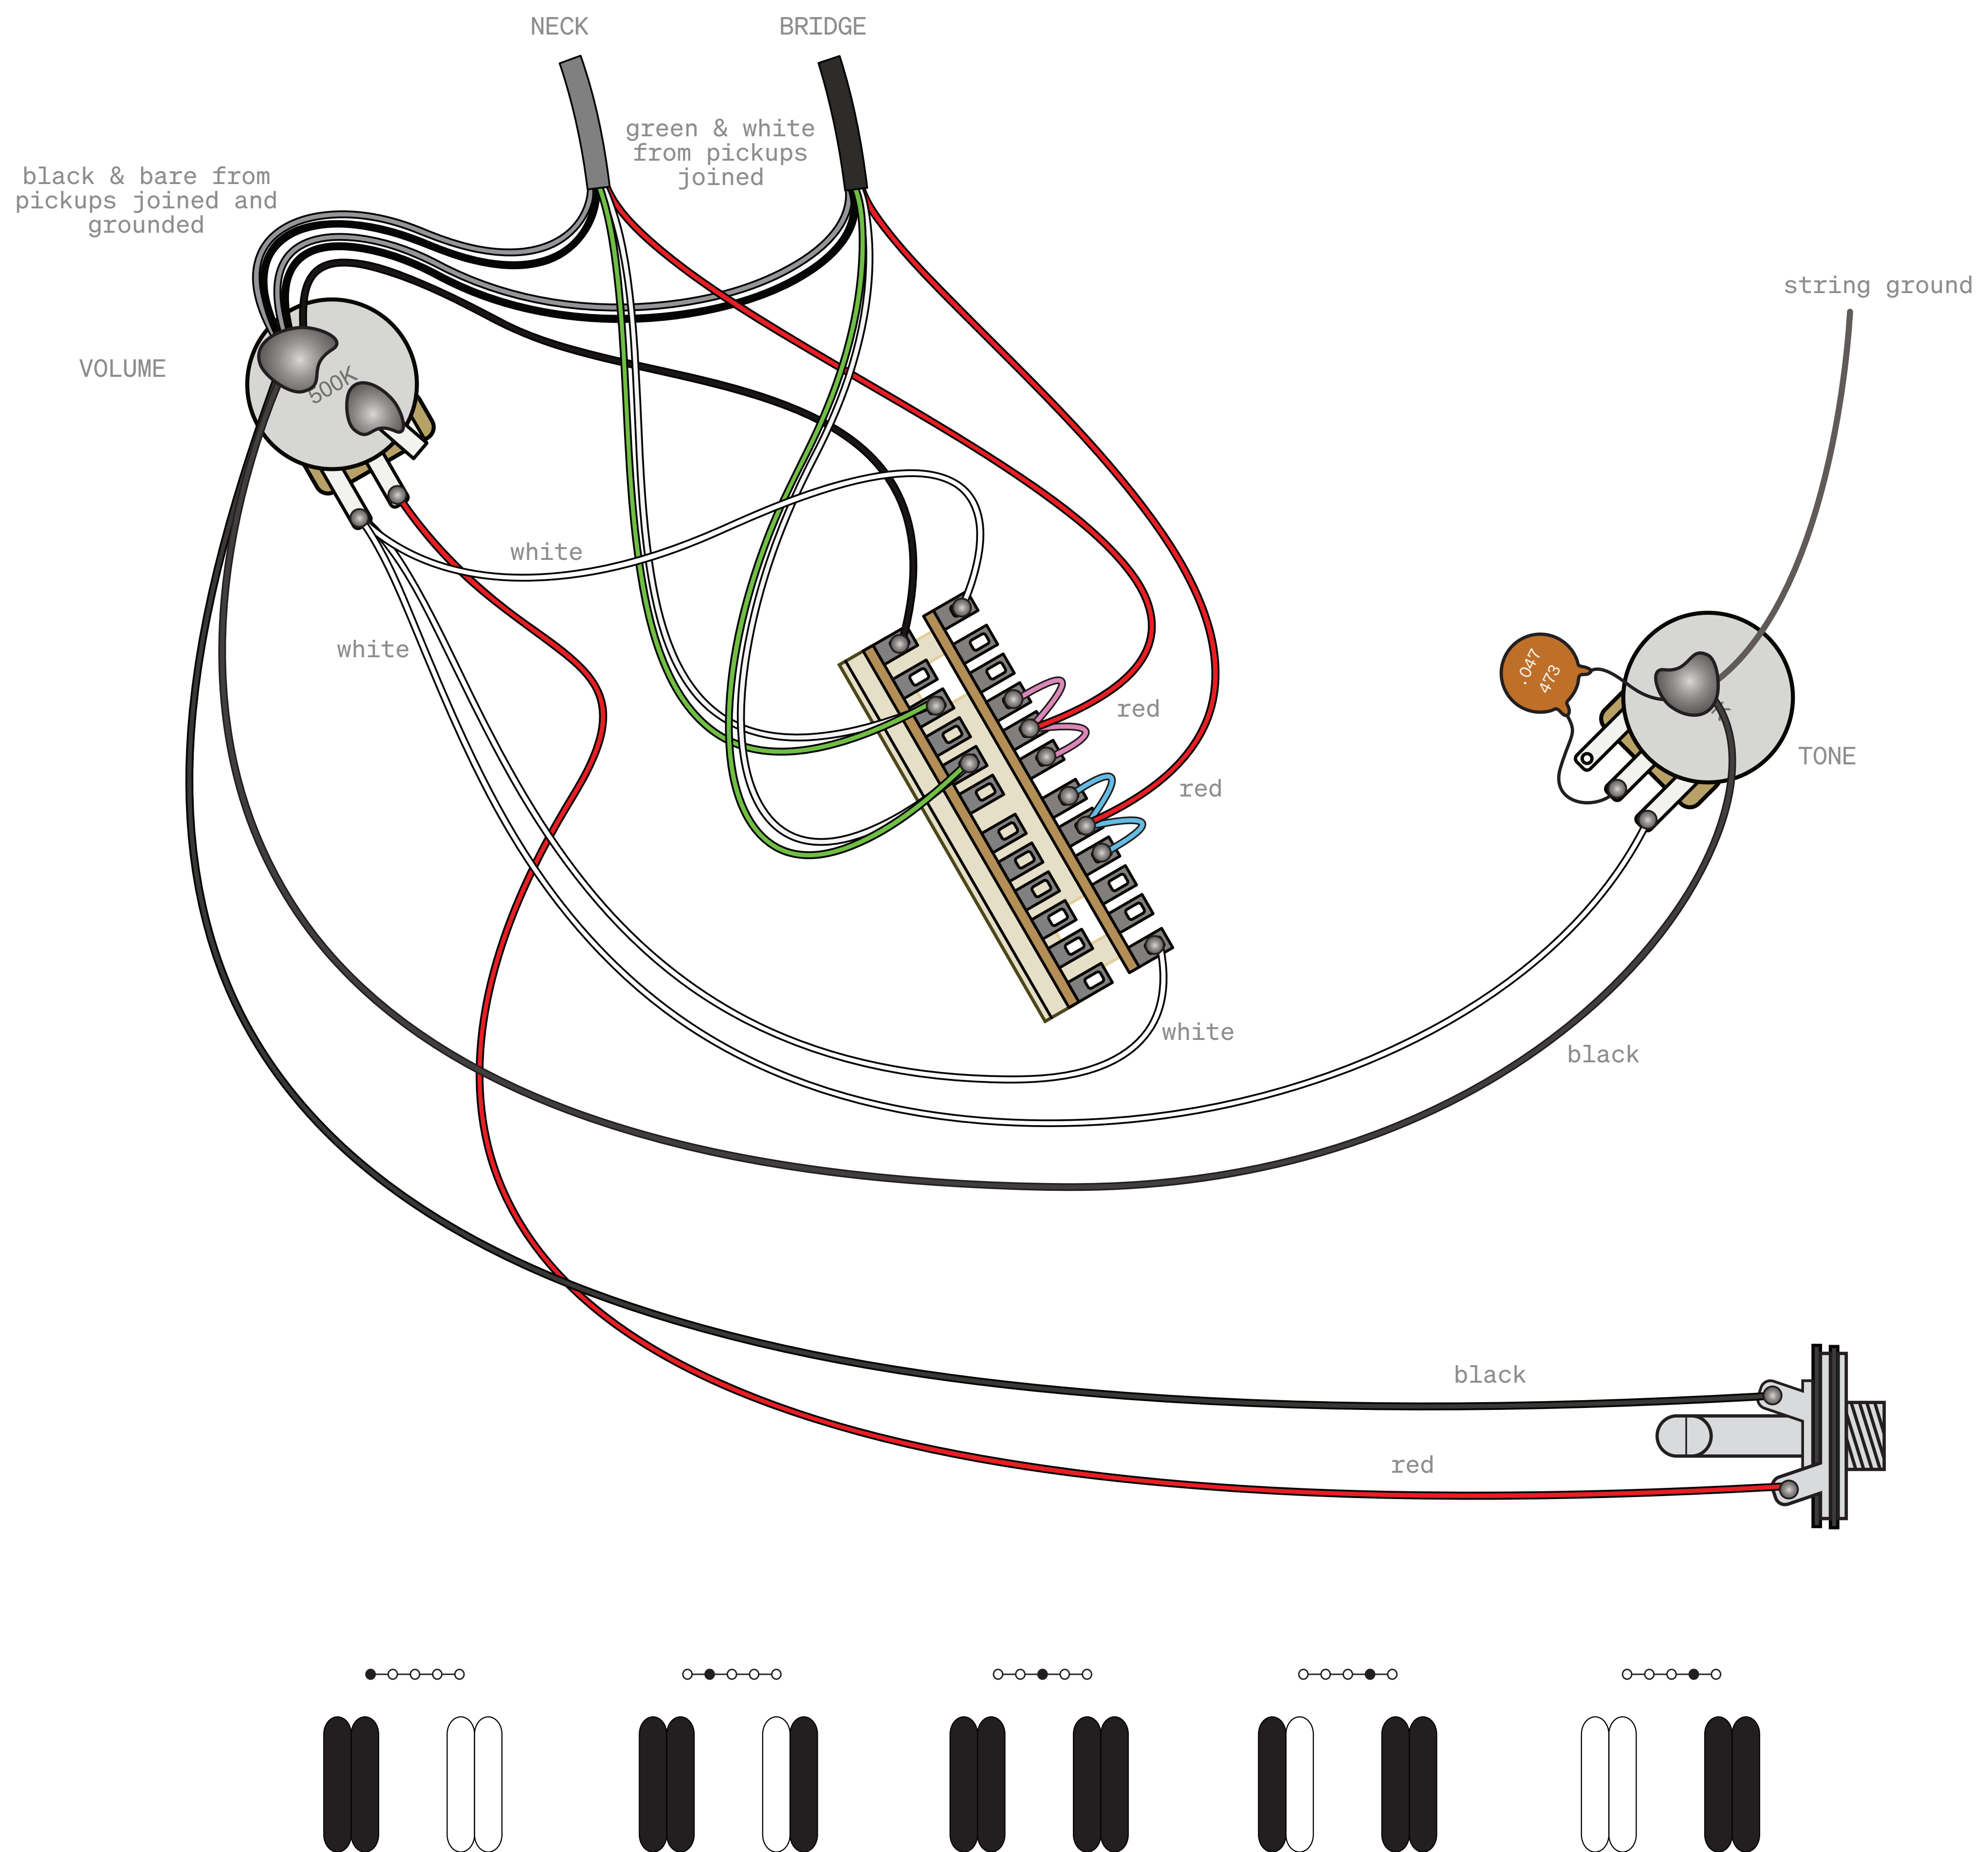

suggested specification

volume: 500K
tone: 500K
tone capacitor: 0.047 μ F
switch: 5-Way Super Switch

notes

Many four-conductor humbucker diagrams can get pretty full of wires. Just remember that a number of the conductors from each pickup are wrapped together and treated as if they were one wire—green and white are joined and soldered to the switch while black and bare wires go to ground. Speaking of ground, there are a lot of wires grounded at the back of the volume pot so take care to get good sound joints.